


CGM - UHMWPE CHEMICAL HOSE

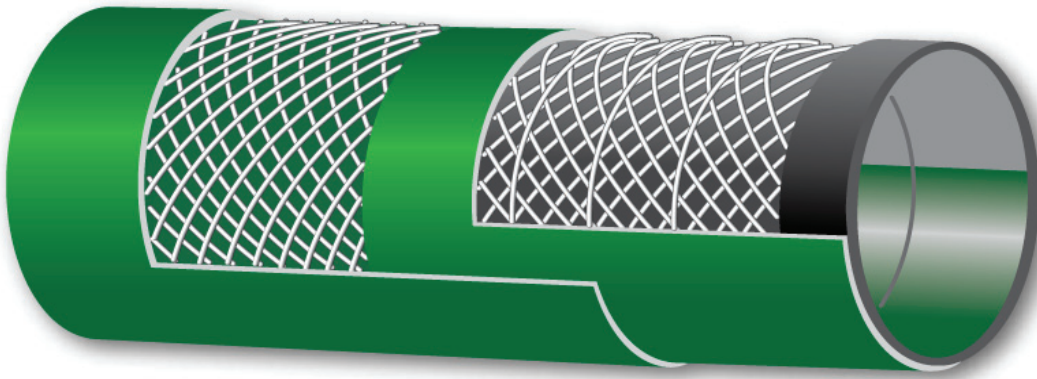

TECHNICAL CHARACTERISTICS

SPECIFICATION: ISO 1307

APPLICATION: For suction and discharge of all corrosive chemicals, especially high aromatic solvents

TUBE: Translucent, food grade UHMW-PE liner suitable for a wide range of corrosive chemicals and solvents







REINFORCEMENT: High tensile synthetic textile, steel wire helix and antistatic copper wire

COVER: Weather, ozone, abrasion resistant EPDM rubber

TEMPERATURE RANGE: -40 degrees C to +80 degrees C

SAFETY FACTOR: 3:1

BRANDING: W=10 BAR CHEMICAL SUCTION AND DELIVERY HOSE. ID MM QTR/YR

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
3/4"	19	31	10	150	80	40
1"	25.4	37	10	150	110	40
1 1/4"	32	45	10	150	165	40
1 1/2"	38	52	10	150	225	40
2"	50.8	67	10	150	350	40