
CGM

UHMWPE CHEMICAL HOSE

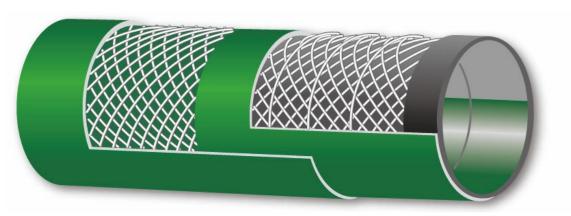

TECHNICAL CHARACTERISTICS

SPECIFICATION: ISO 1307

APPLICATION: For suction and discharge of all corrosive chemicals, especially high aromatic solvents

TUBE: Translucent, food grade UHMW-PE liner suitable for a wide range of corrosive chemicals and solvents

REINFORCEMENT: High tensile synthetic textile, steel wire helix and antistatic copper wire

COVER: Weather, ozone, abrasion resistant EPDM rubber

TEMPERATURE RANGE: -40 degrees C to +80 degrees C

SAFETY FACTOR: 3:1

BRANDING: W=10 BAR CHEMICAL SUCTION AND DELIVERY HOSE. ID MM QTR/YR

		O.O.	W.P	W.P	BR	COIL LENGTH
Inch	mm	mm	BAR	PSI	mm	mt
1"	25.4	37	10	150	110	40
1 1/4"	32	45	10	150	165	40

^{*} NOTE: This hose can also be offered in 3/4" (19 mm); 1 $\frac{1}{2}$ " (38 mm) and 2" (50.8 mm) Internal Diameter sizes on request, subject to a minimum order quantity