


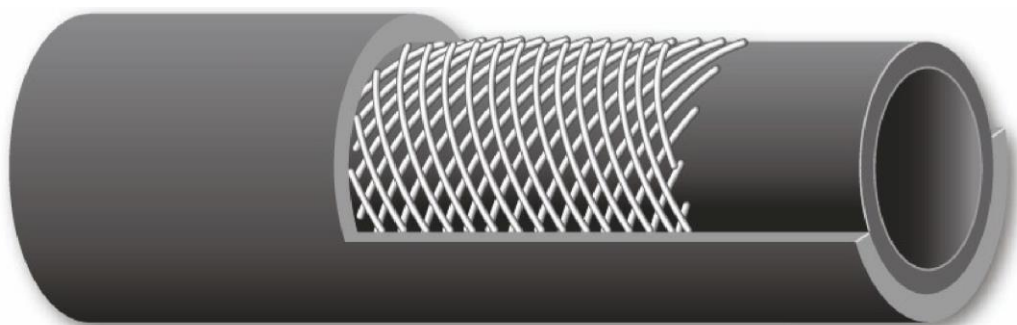

TECHNICAL CHARACTERISTICS

SPECIFICATION: SAEJ30R9

APPLICATION: For fuel injection systems

TUBE: NBR / SBR Blended

REINFORCEMENT: Polyester Yarn

COVER: Black, NBR / SBR

TEMPERATURE RANGE: -34 degrees C to +135 degrees C

SAFETY FACTOR: 4:1

BRANDING: W=SAE J30 R9 FUEL INJECTION ID IN MM

Date of manufacture is embossed (YYYY MM) on opposite side

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
N/A	4.8	11.5	15	225	60	100
N/A	5.6	12.6	15	225	70	100
N/A	7.6	14.6	15	225	90	100
N/A	9.5	16.5	15	225	110	100

In response to previous customer enquiries, our suppliers have advised that:

- The Fuel Injection Hose is suitable for submerging
- The Fuel Injection Hose is suitable for E5 and E10 grades of Bio-ethanol fuel
- The Fuel Injection Hose is suitable for oxidised sour gas and lubrication oil
- The Fuel Injection Hose can be used for Adblue provided the temperature is no higher than 90 degrees C
- The Unleaded Fuel Hose does have a R10 rating
- The Unleaded Fuel Hose can be used to transfer unleaded fuel