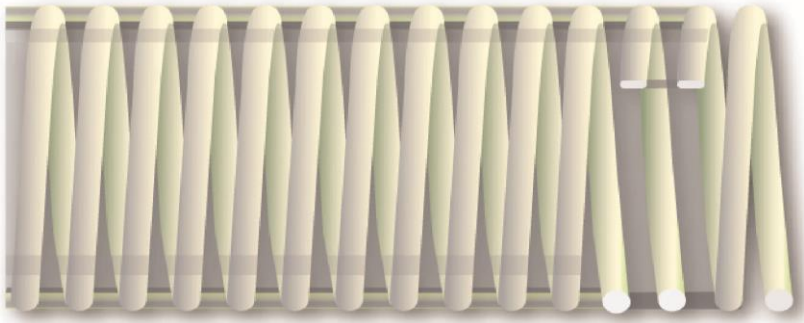


NTSD

CLEAR NON-TOXIC WITH WHITE SPIRAL



TECHNICAL CHARACTERISTICS

SPECIFICATION: N/A

APPLICATION: Suction and delivery of water, oil, powder, granules in pump industries, constructions, mining, marine and other applications

TUBE: Smooth non-toxic plasticised PVC







REINFORCEMENT: Shock resistant PVC spiral

COVER: Smooth non-toxic plasticised PVC

TEMPERATURE RANGE: -5 degrees C to +60 degrees C

SAFETY FACTOR: 3:1

BRANDING: N/A

	I.D	O.D	W.P	W.P	BR	COIL LENGTH
						
Inch	mm	mm	BAR	PSI	mm	mt
3/4"	19	25	6	90	80	30
1"	25	31	5	75	100	30
1 1/4"	32	38	5	75	130	30
1 1/2"	38	45	5	75	150	30
2"	51	59	5	75	210	30
2 1/2"	63	73	5	75	260	30
3"	76	84	5	75	310	30
4"	102	114	4	60	410	30